




Trilo MDR 50

- Roller mowers

www.trilo.com



Transport , to facilitate stable transportation, the machine is equipped with rigid mechanical safety locks.

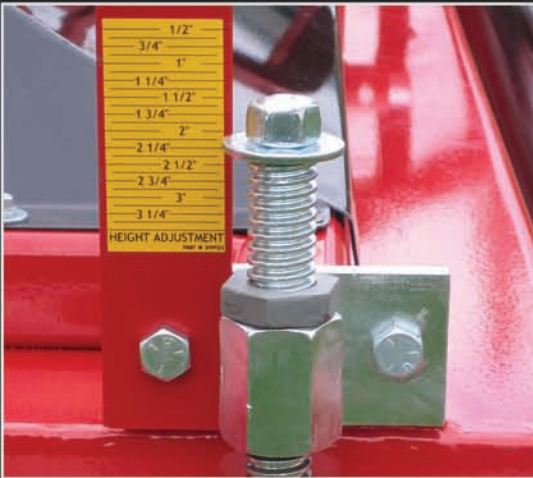

Height adjustment, infinite number of adjustments available from 1/2" to 4". All locations are fully accessible.

Trilo MDR 50 15 mtr. roller mower

Trilo new "Multi Deck Roller mower" MDR 50 is your best choice when you talk about capacity on today's turf farm. The MDR 50 is the ultimate unit to make a quality cut, in a straight forward design. Built to the exceptional high standard which guarantees low maintenance that the industry has come to expect from Trilo.

The machine is complete mechanical driven by 1000 rpm PTO which provides a smooth working machine. A very low ground pressure is assured because of the 4 wide full floating tires. These tires are mounted in the middle from the chassis so a excellent weight distribution is guaranteed.

The machine is only 3 meters wide and less than 4 meters high during transport. Because of an unique transport folding system it is possible to stay inside these dimensions, which make it possible to move fast from one field to another to save time and be more efficient.

The MDR 50 is equipped with 7 reliable Progressive 90 inch roller decks. The mower can cut as low as 13 mm and provide an even cut without scalping. Ø 150 mm, 4.7 mm thick wall rollers allows deck to bridge ribbons and small ditches without scalping.

The Progressive mowers are used there where a quality cut is desired. Each deck is standard equipped with 4 x 24 inch high lift blades which provide a quality cut and good grass distribution. The rear roller guarantees a safe discharge from the grass clippings.

All Trilo machines are CE certified.

Technical Specifications

Working width:	15.00 m	Construction:	Formed and welded
Transport width:	3.00 m	Deck:	single piece of 3/16 " (4.7 mm)
Length:	6.60 m	Roller:	Ø 150 mm, 4.7 mm thick
Height:	3.95 m	Spindles:	Ø 35 mm (grease able)
Weight:	10.250 kg	Tip speed blade:	325 km/h
Tongue weight:	280 kg (mowing)	Blade RPM:	3040 rpm
Tongue weight:	630 kg (transport)	Blade dimensions:	24 inch (61 cm)
Required HP	130 - 150 Hp	Number of blades:	28 pieces
Cutting height	13 - 100 mm	Option:	Low lift blades
PTO	1000 rpm		
Transport tires	4 x full floating 26/50-22.5		



Vanmac
Astronaut 40
 NL - 3824 MJ Amersfoort
 Tel.: (+31) (0)33 456 45 50
 Fax.: (+31) (0)33 456 44 33
 Internet: www.trilo.com